

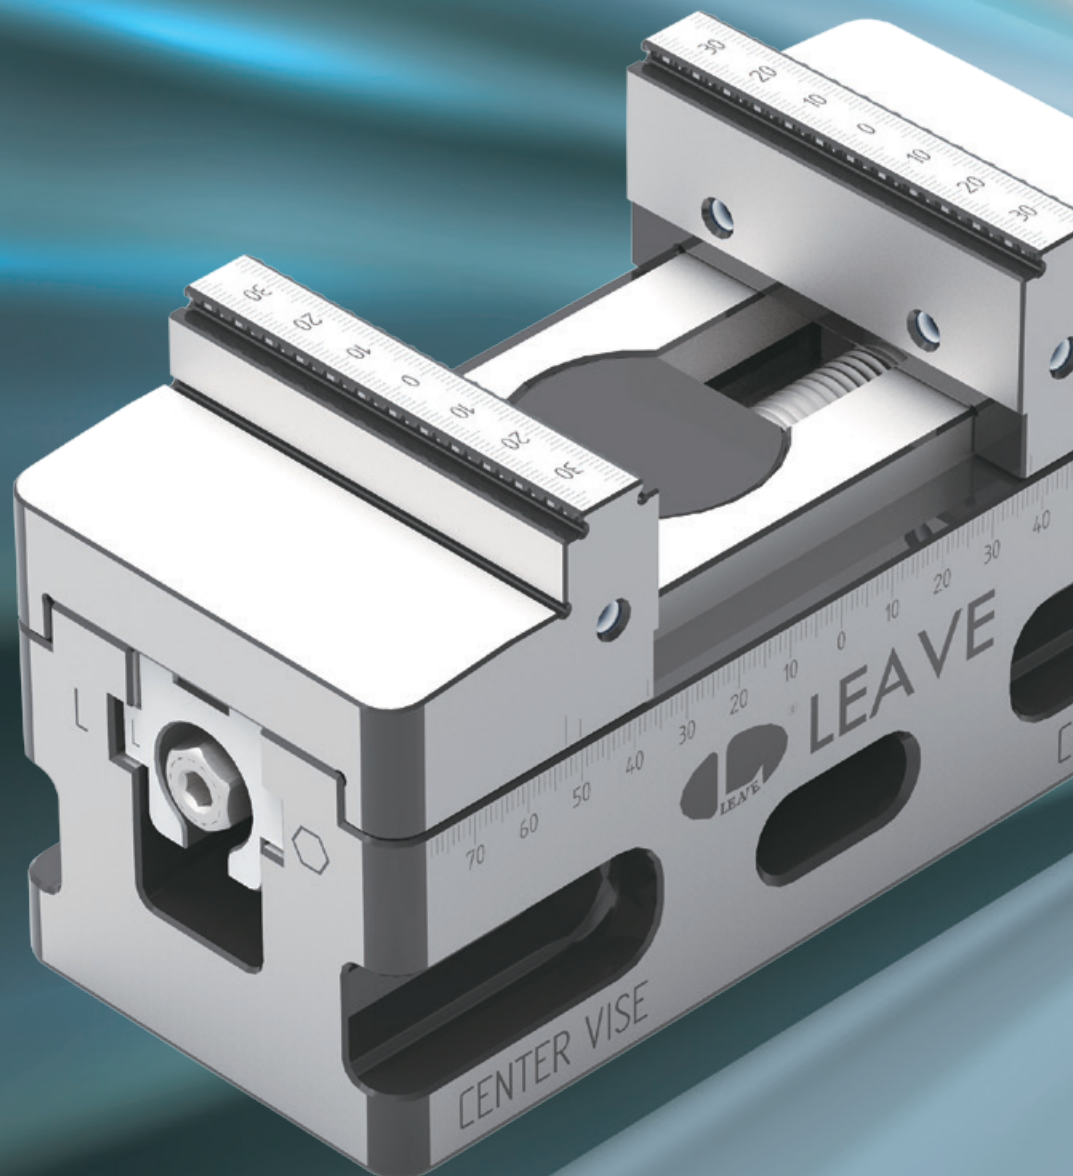
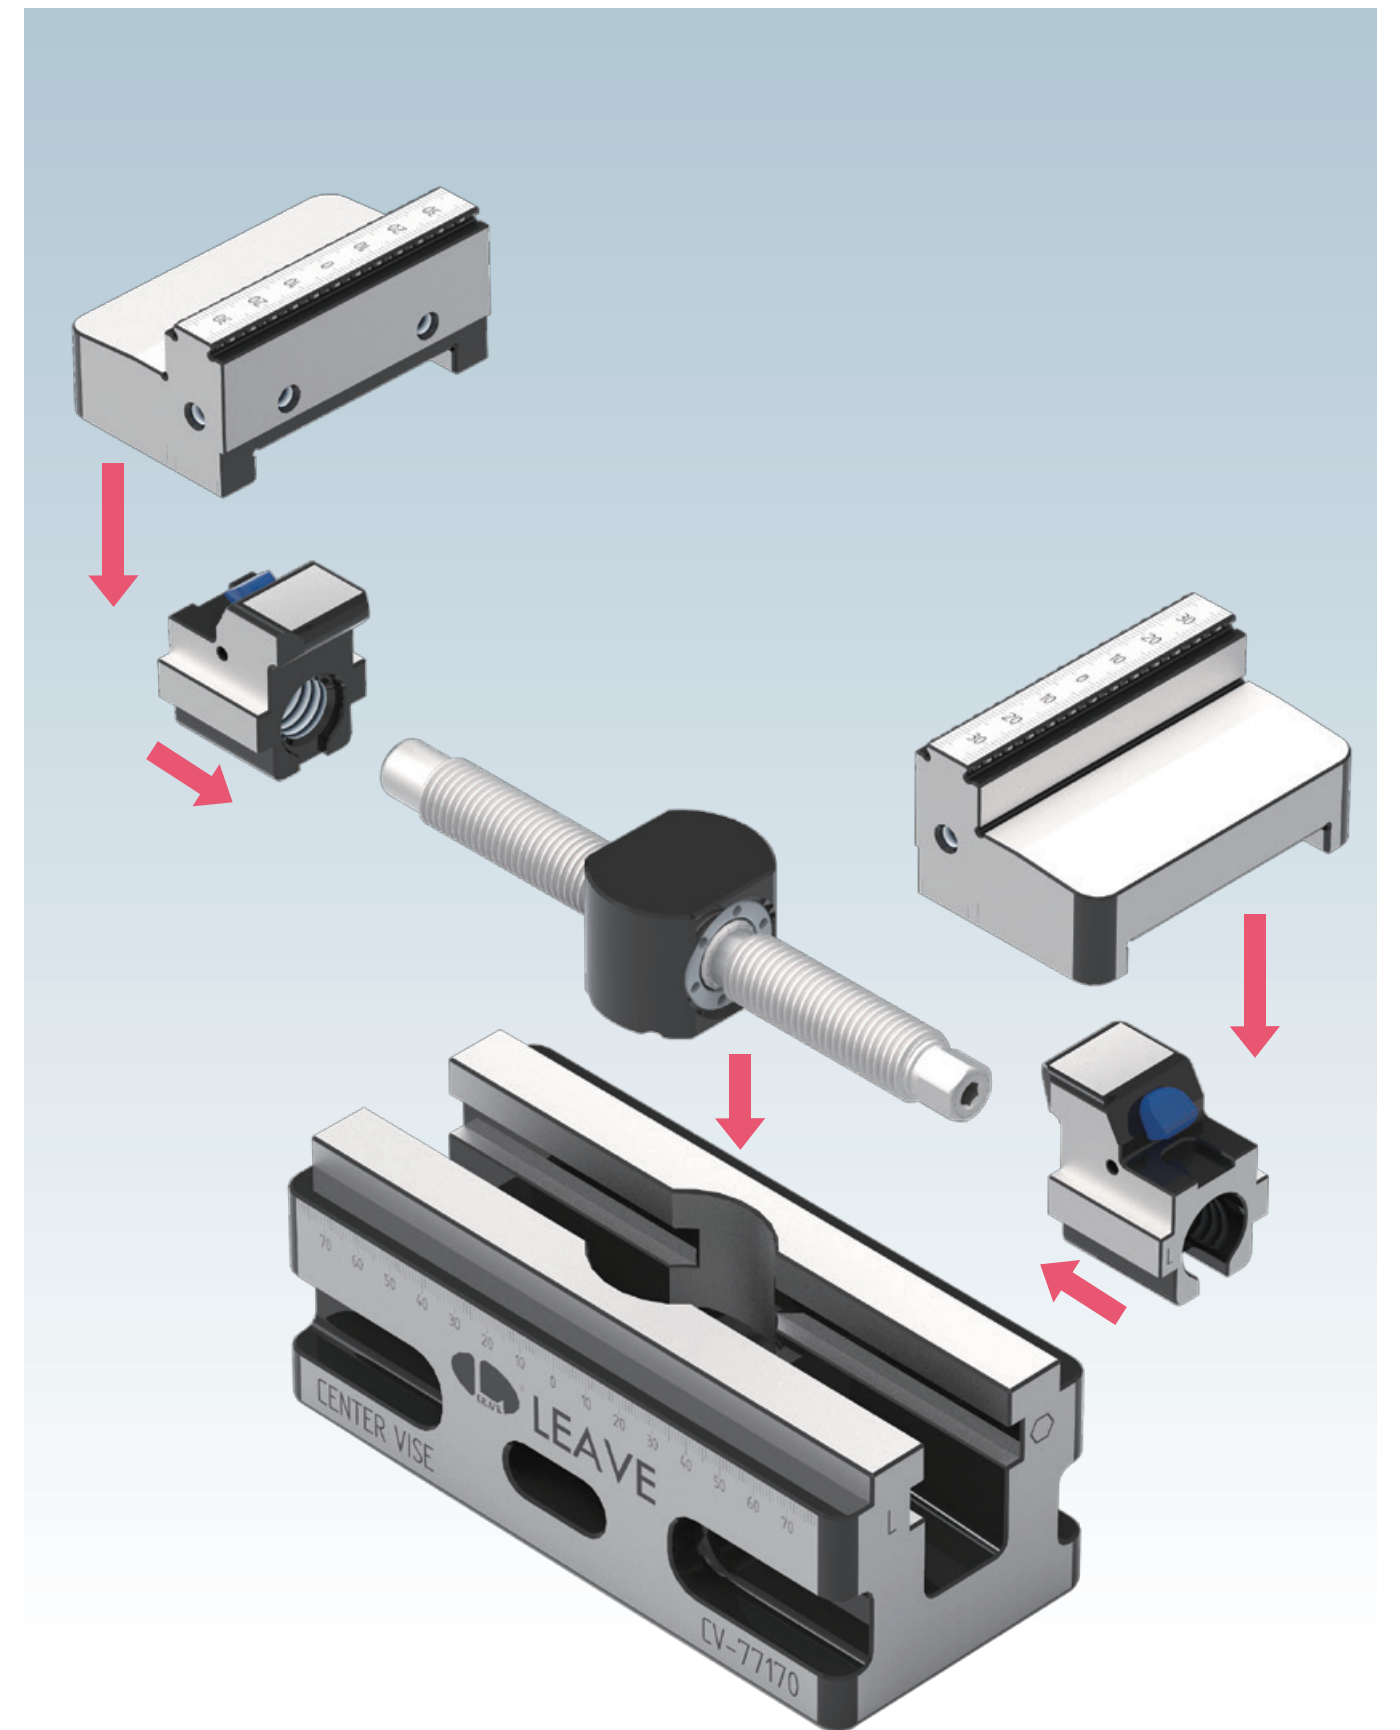


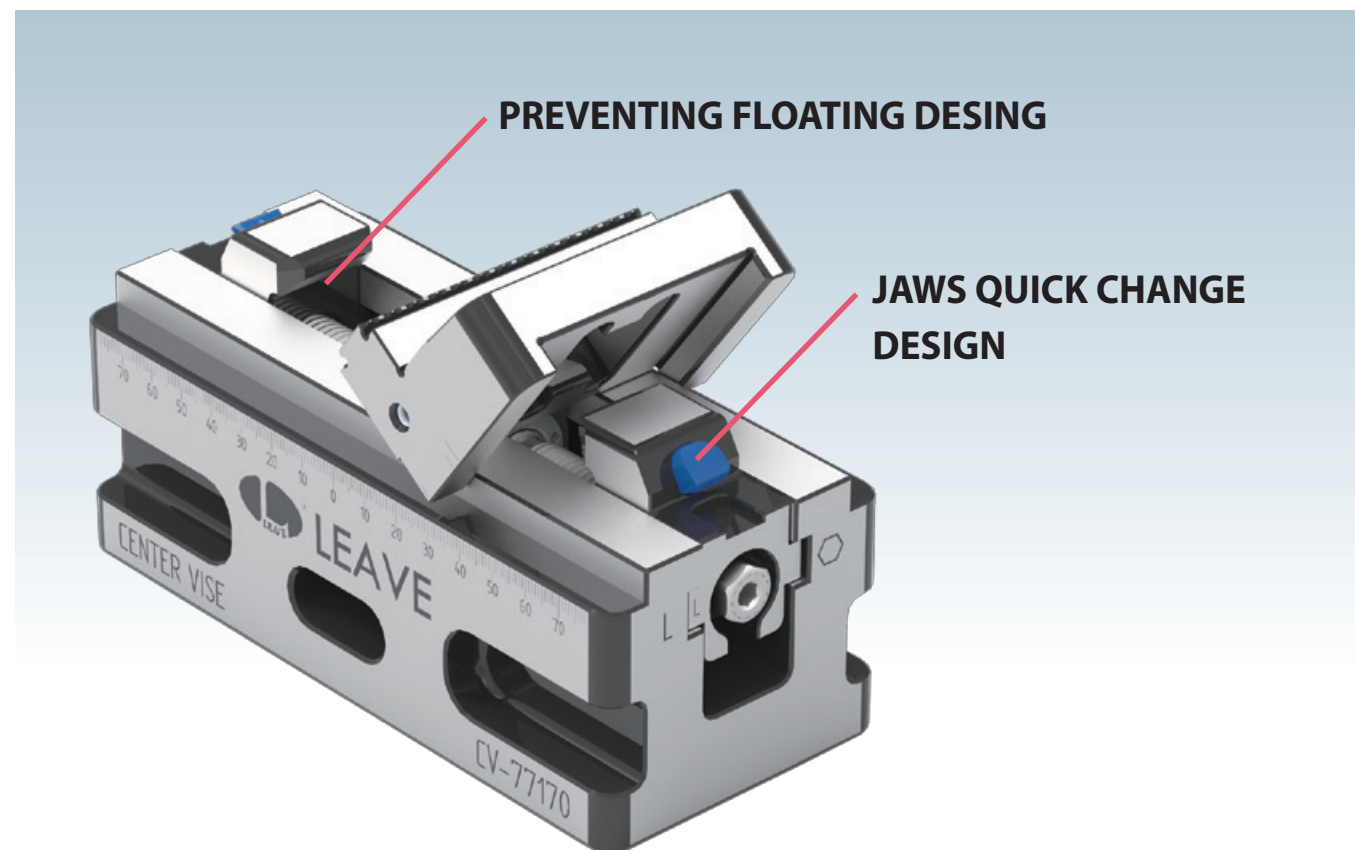

CENTER VISE


FEATURES INTRODUCTION

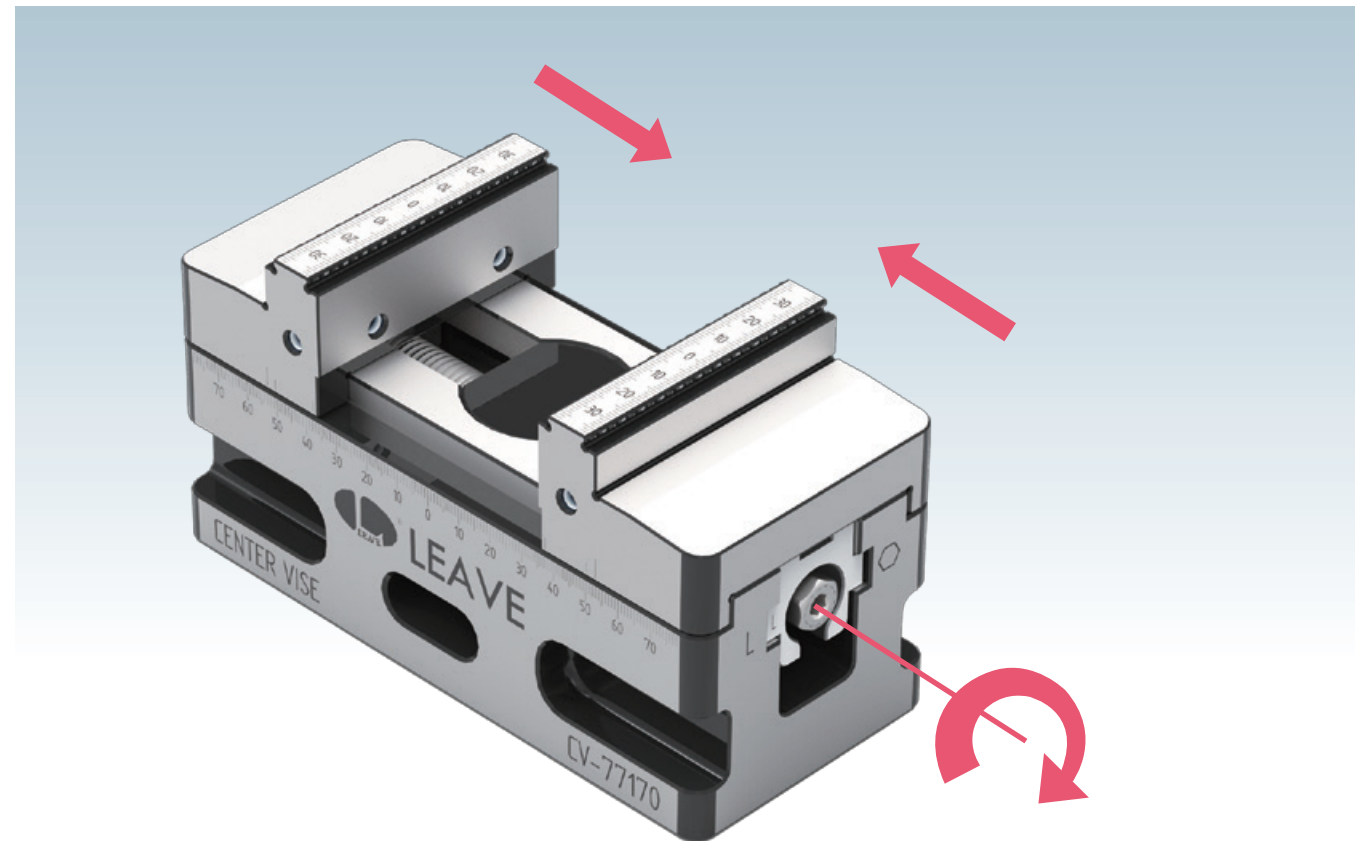


CV-77170







CV-77210

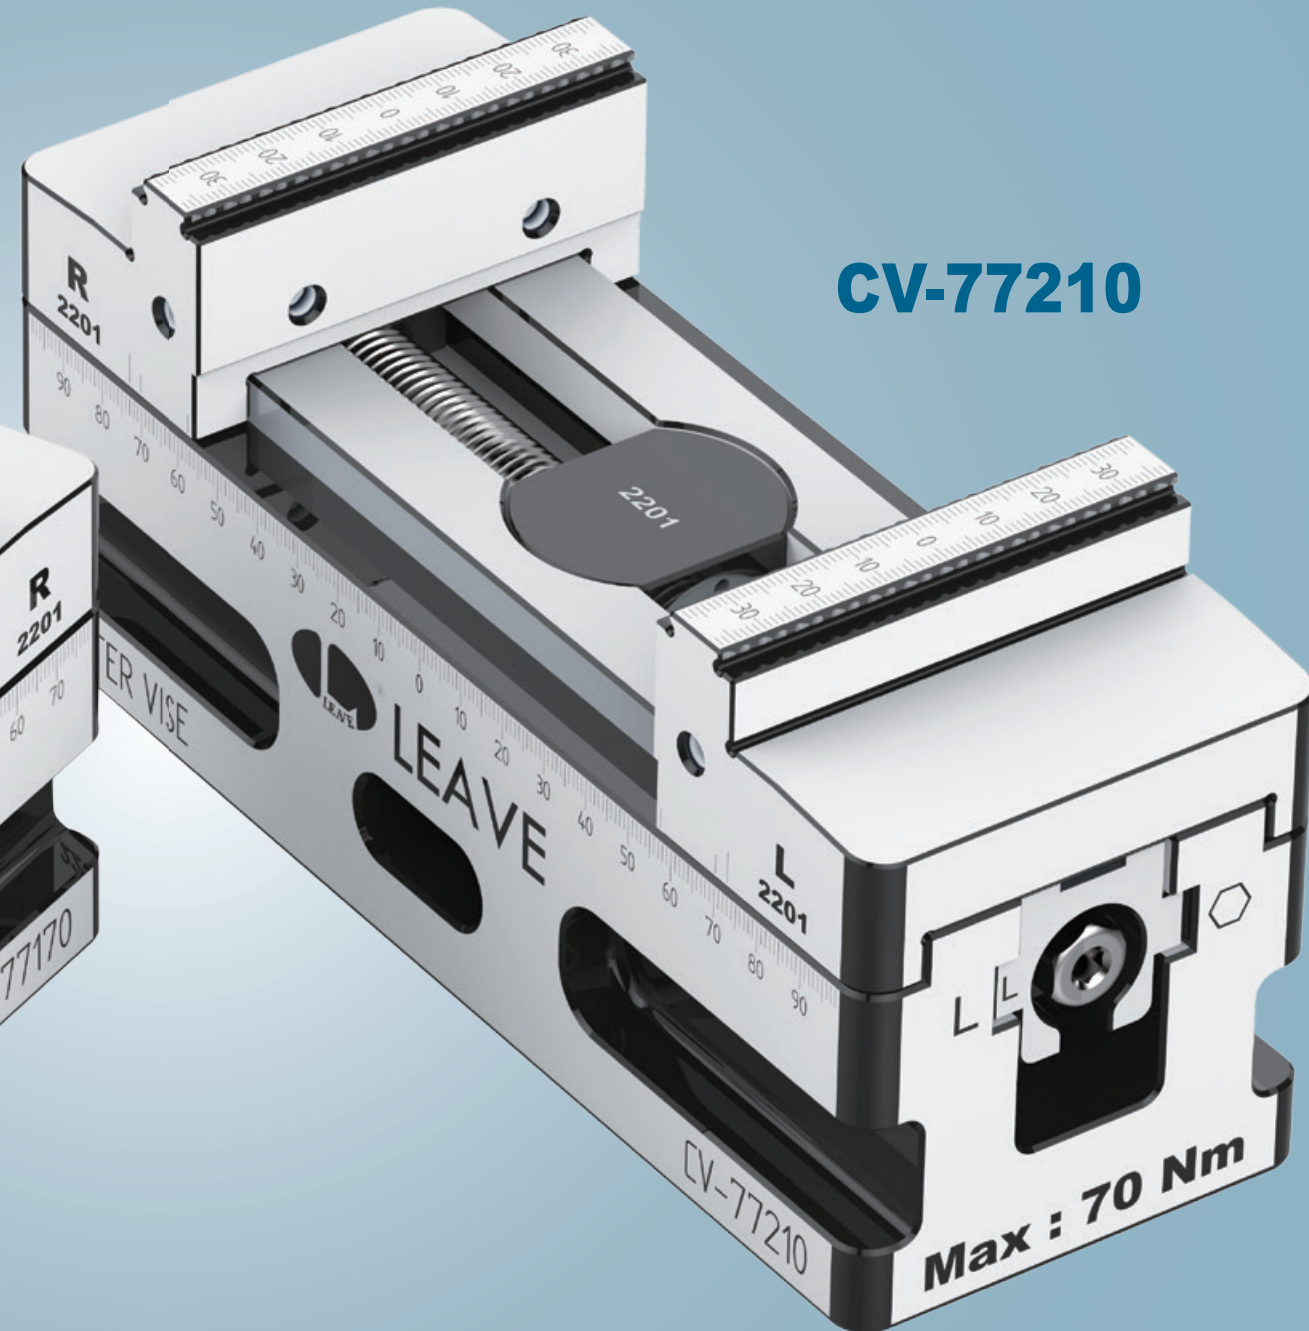


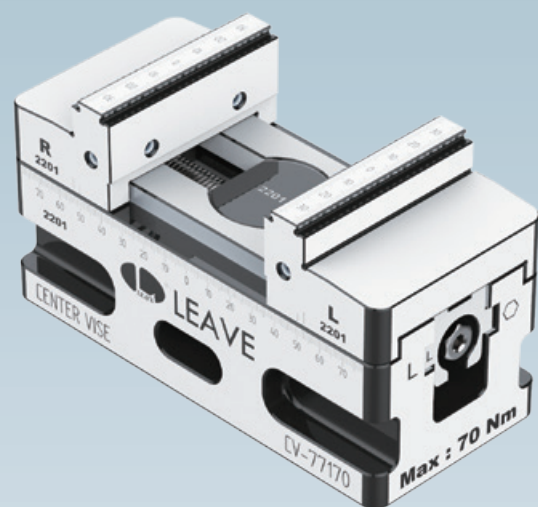


Material : tool steel
Heat treated : HRC 55°

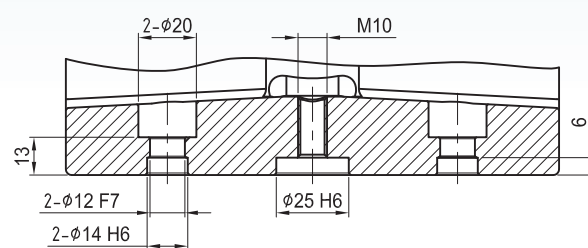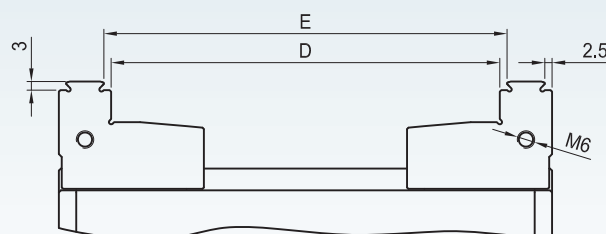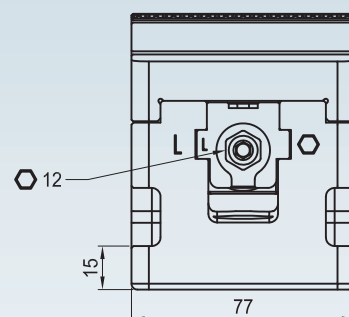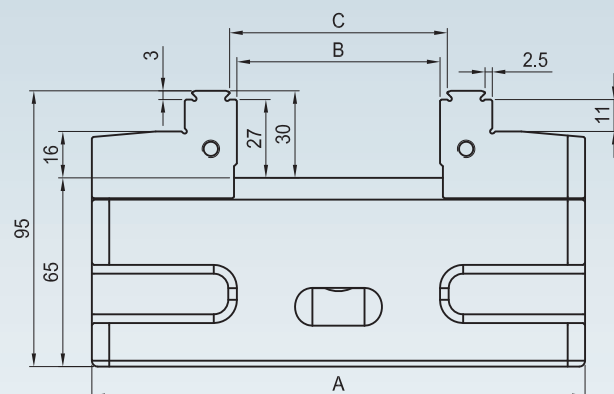


G-G

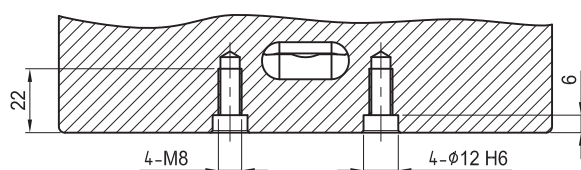

M-M

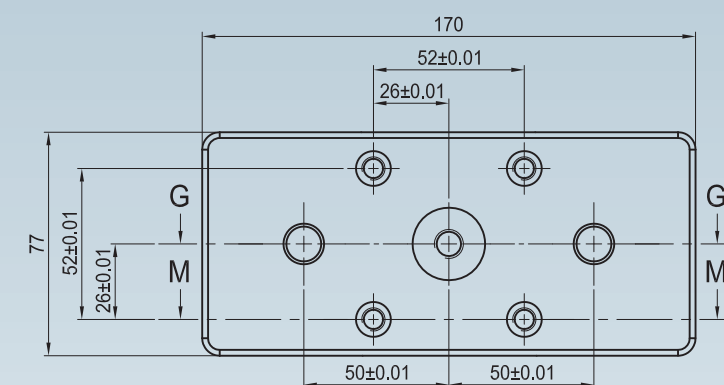

CV-77170

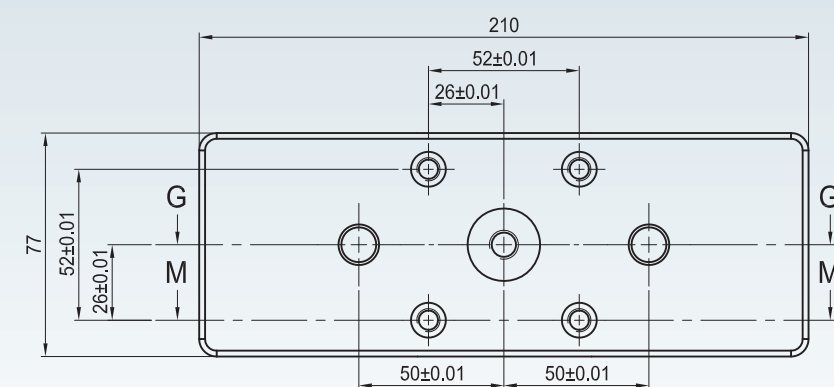

CV-77210

MODEL	A	B	C	D	E	kg	Center Positioning	Toque	Holding Force
CV-77170	170	0~70	6~75	65~134	71~139	5.5	± 0.02	MAX 70 Nm	13000 N
CV-77210	210	0~110	6~115	65~174	71~179	6.5			


CV-125360




CV-125310




CV-125210



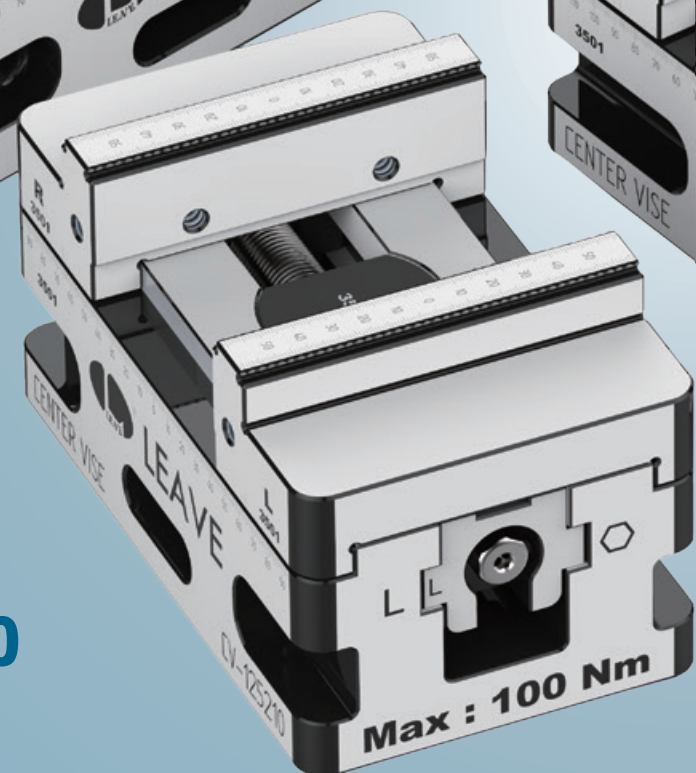


CV-125260

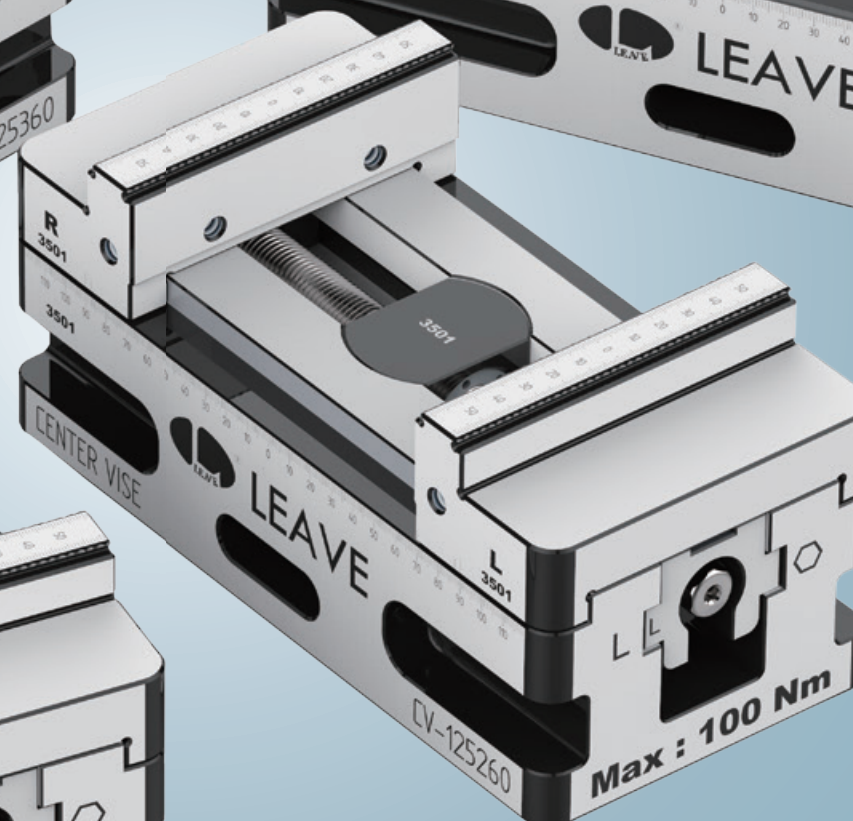


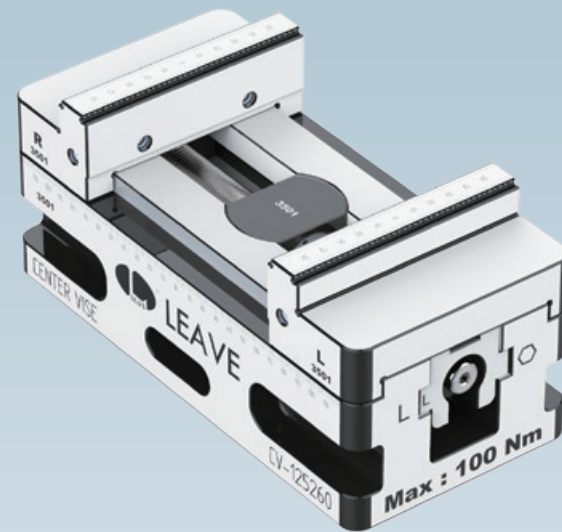


Material : tool steel
Heat treated : HRC 55°

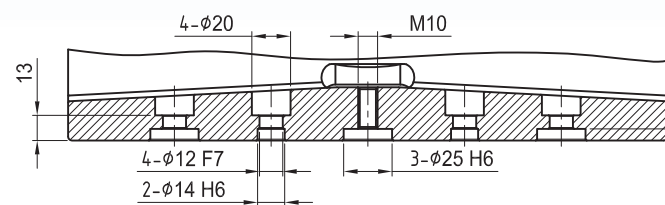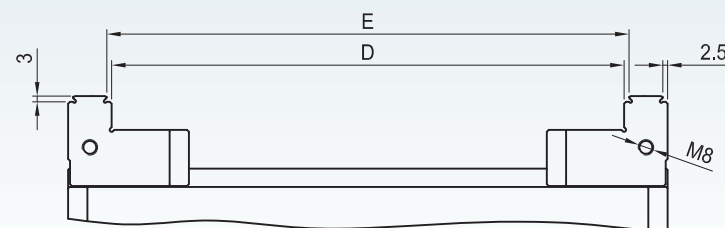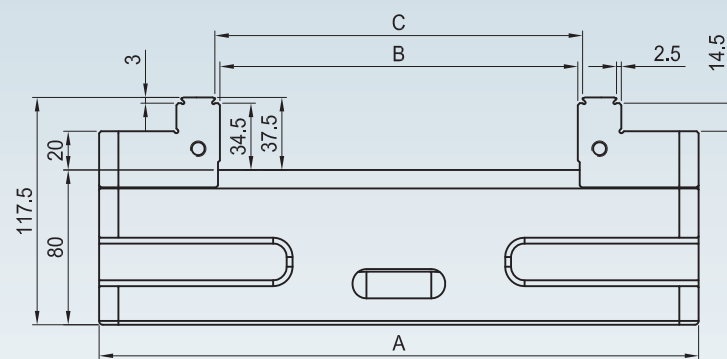


S-S

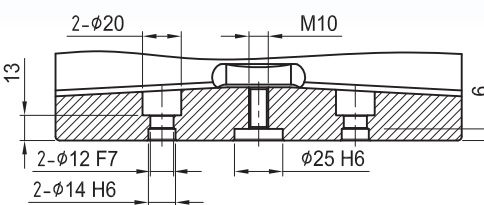


G-G

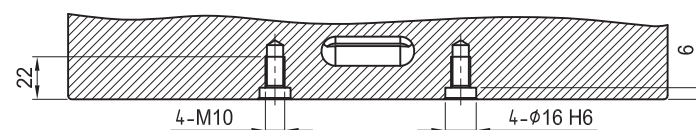

W-W

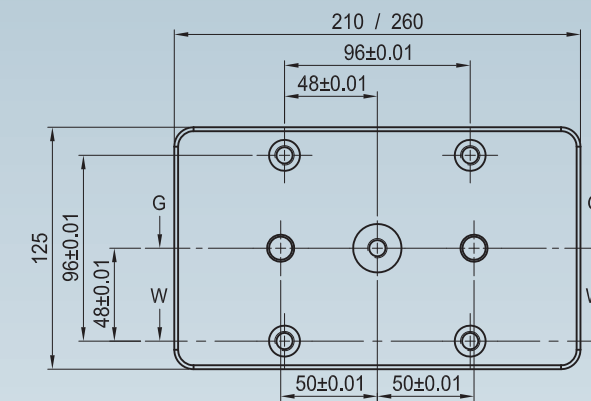

CV-125210 / CV-125260

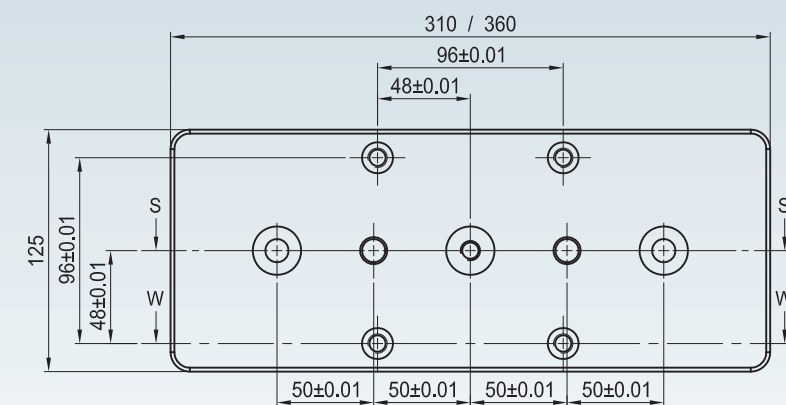

CV-125310 / CV-125360

MODEL	A	B	C	D	E	kg	Center Positioning	Toque	Holding Force
CV-125210	210	0~85	6~90	81~165	87~170	14.5	± 0.02	MAX 100 Nm	18000 N
CV-125260	260	0~135	6~140	81~215	87~220	17			
CV-125310	310	0~185	6~190	81~265	87~270	19			
CV-125360	360	0~235	6~240	81~315	87~320	21.5			



LEAVE INDUSTRIAL CO., LTD.

No. 22, Xinguang E. Rd., Daxi Dist.,
Taoyuan City 335, Taiwan

TEL:886-3-3806222 FAX:886-3-3806333

E-mail:leaveco@ms19.hinet.net

www.leave-fixture.com

